

概述

BP818

BP818

BP818

BP818

BP818

LSOP-4

5000 VAC

GB4943.1

> 8 mm


UL62368

TUV

IEC62368

CQC

VDE IEC60747



LSOP-4


特点

-
-
- -55 °C ~ 125 °C
-
- 5000 VAC
- >8 mm
- UL62368
- TUV IEC62368
- CQC GB4943.1-2022
- VDE IEC60747

应用领域

- QC / USB PD / AC/DC
- AC/DC

电气原理图

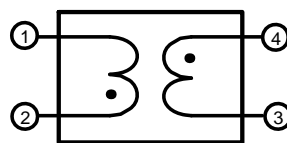


1. BP818

订购信息

订购型号	封装	包装形式	打印
BP818	LSOP-4	3000 /	BP818 XXXXXX ZZWWD

管脚封装

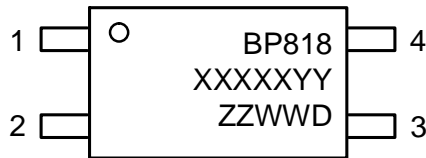

BP818
XXXXXXYY:
ZZ:
WW
D

2. LSOP-4

极限参数(注 1)

符号	参数	参数范围	单位
V_{ISO}		5000	Vrms
P_{DMAX}	(2)	300	mW
T_{OPR}		-55 to +125	
T_{STG}		-55 to +150	
T_{SOL}	(3)	260	

1

2


T_{JMAX} J_A

T_A

$P_{DMAX} = (T_{JMAX} - T_A) / J_A$

3

10

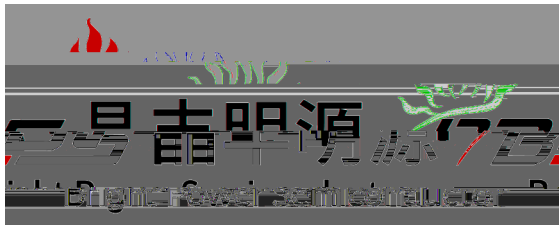

BP818

磁耦隔离器

免责声明

â

BPS Confidential